

HIGH QUALITY QUAD

PRE-CALIBRATED

PRE-ASSEMBLED..... QUICK, SIMPLE ASSEMBLY FOR YOU!

Our antennas are all supplied completely pre-assembled and pre-calibrated, and not with assembled kit. The wind-breaks of glass-fibre tubes are realized with isolating military-type cables of very high quality.

- Every antenna has already been assembled at the factory, then disassembled for shipment.
- Each piece is marked for easy assembly.
- Each element is bundled separately, making assembly quick and easy.



The loop wires are fixed on the fiberglass tubes by us in our factory



All models support very strong winds

Maximum wind survival, for all: Km/h 161 (100 mph)

MODEL	BANDS m.	ELEMENTS	POWER Kw	GAIN dBd	F/B db	F/S db	wind load m ² (ft ²)	WEIGHT Kos (lbs)	TURNING RADIUS m. (ft)	BOOM m. (ft)	Mast required mm (in ⁴)	Rotator
C 23/2	10-15-20	2	2	7-6.5-6.5	20-25	45	1.15 (12.37)	21 (46.3)	2.7 (8.9)	5.5 (18)	60 (2-3/8)	GE 1500/T
C 25/2	10-12-15-17-20	2	2	7-7-6.5-6.5-6.5	20-25	45	1.20 (12.9)	22 (48.5)	2.7 (8.9)	5.5 (18)	60 (2-3/8)	GE 1500/T
C 33/2	10-15-20	3	2	9-8.5-8	20-25	47	1.65 (17.76)	34 (74.95)	3.5 (11.48)	8 (26.3)	76 (3)	GE 1500/T
C 35/2	10-12-15-17-20	3	2	9-9-8.5-8-8	20-25	47	1.7 (18.29)	35 (77.16)	3.5 (11.48)	8 (26.3)	76 (3)	GE 1500/T
C 43/2	10-15-20	4	2	10-9.5-9	22-27	48	2.3 (24.75)	49 (108)	4.7 (15.4)	10.5 (34.5)	103 (4)	GE 2500/T
C 45/2	10-12-15-17-20	4	2	10-10-9.5-9-9	22-27	48	2.4 (25.83)	51 (112.43)	4.7 (15.4)	10.5 (34.5)	103 (4)	GE 2500/T
C 63/2	10-15-20	6	2	12-11.5-11	25-30	50	3.4 (36.6)	76 (167.55)	7.7 (25.26)	15.5 (50.9)	103 (4)	GE 4000/T
C 65/2	10-12-15-17-20	6	2	12-12-11.5-11-11	25-30	50	3.5 (37.67)	78 (171.96)	7.7 (25.26)	15.5 (50.9)	103 (4)	GE 4000/T
C 240/33/2	10-15-20-40	3+2 (40)	2	9-8.5-8-6.5	20-25	47-45	2.75 (29.6)	81 (178.57)	6 (19.68)	12 (39.4)	103 (4)	GE 2500/T
C 240/35/2	10-12-15-17-20-40	3+2 (40)	2	9-9-8.5-8-8-6.5	20-25	47-45	2.9 (31.2)	82 (180.77)	6 (19.68)	12 (39.4)	103 (4)	GE 2500/T
C 44/2	10-15-20-40	4	2	10-9.5-9-10	22-27	48	8.6 (92.57)	290 (640)	11 (36)	22 (72.17)(Tower)	Flange	GE 6000/T
C 280/44/2	10-15-20-40-80	4+2 (80)	2	10-9.5-9-10-7	22-27	48-45	15.65(168.45)	590 (1300.7)	12 (39.37)	24 (78.7) (Tower)	Flange	GE 8000/T
C 280/2	80	2	2	7	22	45	13.6 (146.38)	660 (1455)	14 (45.9)	28 (91.8) (Tower)	Flange	GE 8000/T




Our Quad multi-band antennas are available in standard and custom designs. Shown here are our standard models.

If you do not see what you need, please contact us and we will build it for you.

The 10 Kw version is available for all models



HIGH QUALITY QUAD

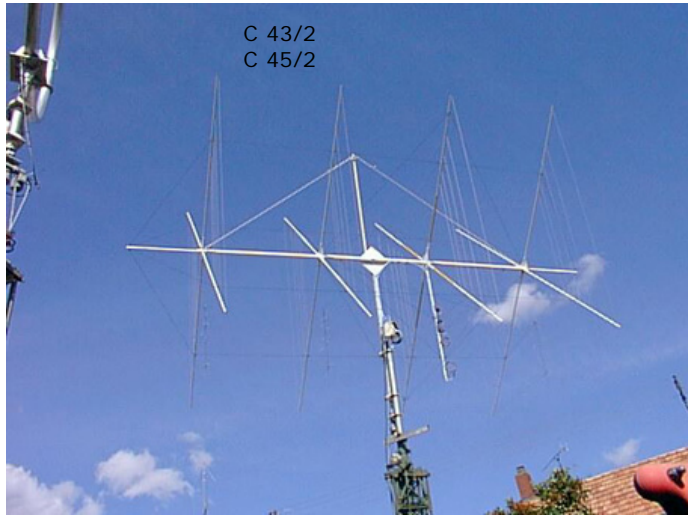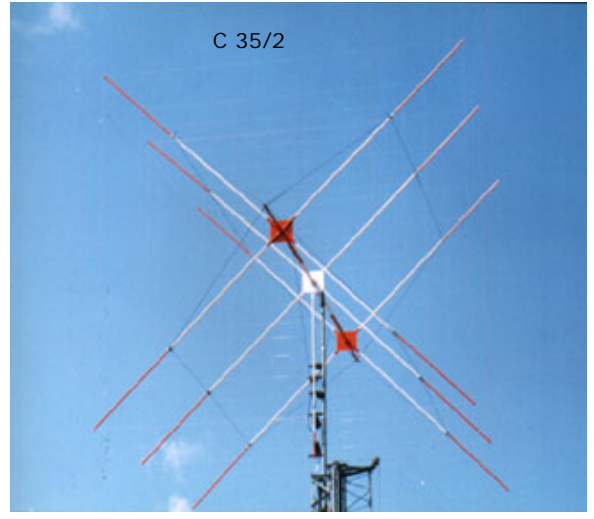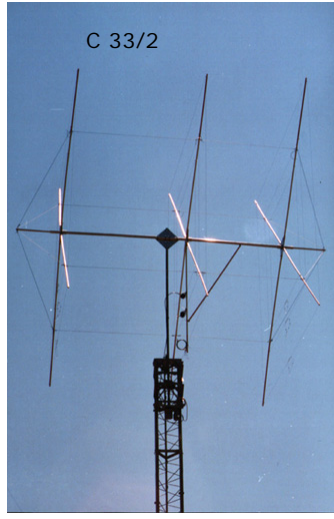

MOD.	SHIPPING measures	
	Wood CASE	WT.
C 23/2 - C 25/2	4 x H 0.4 x 0.6 m 13.2 x H 1.3 x 2 ft	Kos 85 lbs 187.4
C 33/2 - C 35/2	5.6 x H 0.4 x 0.6 m 18.4 x H 1.3 x 2 ft	kos 120 lbs 264.55
C 43/2 - C 45/2	4 x H 0.4 x 0.85 m 13.2 x H 1.3 x 2.8 ft	kos 150 lbs 330.7
C 63/2 - C 65/2	6.2 x H 0.5 x 0.85 m 20.4 x H 1.7 x 2.8 ft	kos 210 lbs 462.97
C 240/33/2 C 240/35/2	5.5 x H 0.5 x 0.90 m 18 x H 1.7 x 3 ft	kos 200 lbs 440.92

